


Due to continuous product development we reserve the right to change better quality, material & minor design changes

This drawing shall not be copied or reproduced in any form without the prior written permission of the company

TECHNICAL DATA:

Manufacturing Std. : API 526 / API 520
 End Connection : Flanged Ends to ASME B16.5 FF 150#

MODEL NO: DVFL-42

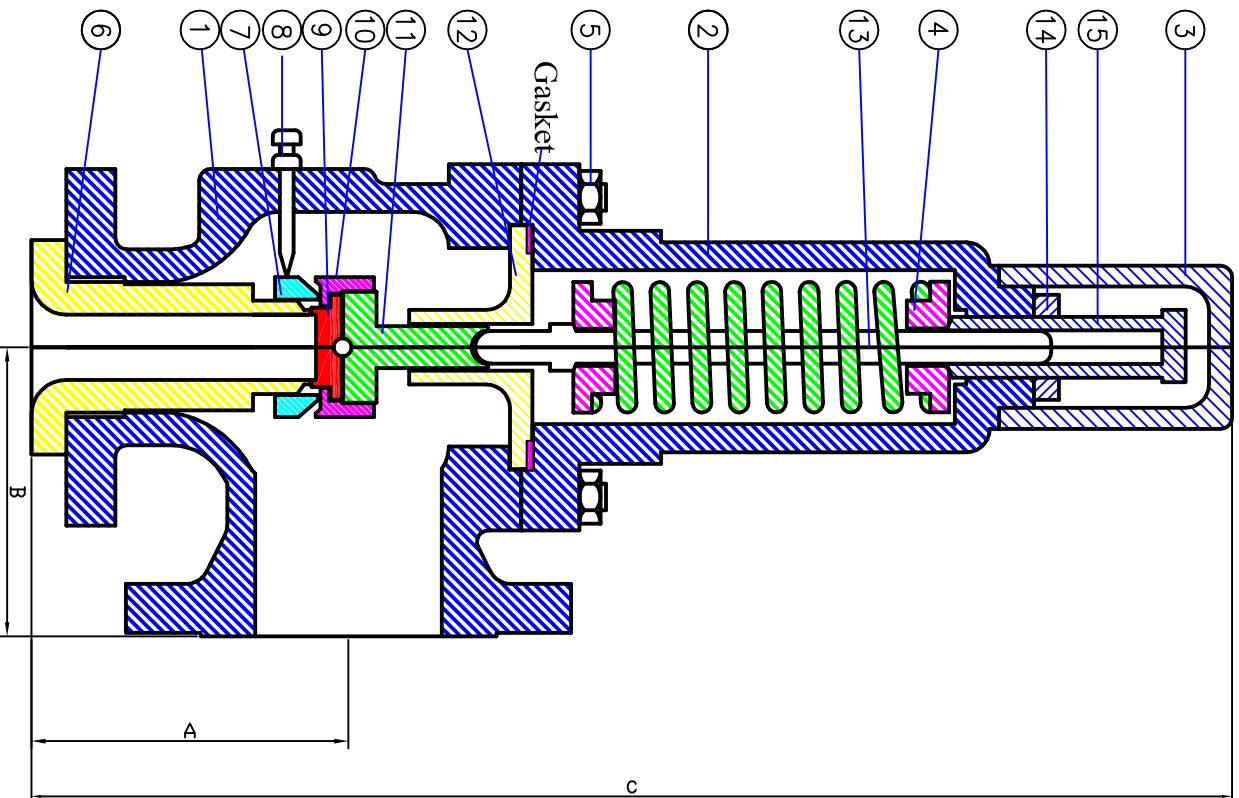

SET PRESSURE : MAX 18 KG/CM2

INLET 2" (150#)	OUTLET 3" (150#)	
A 137	B 124	
Orifice J(1.287)	C "approx"	
± dim (A&B 5)		

15	ADJUSTING SCREW	SS 316
14	LOCK NUT	SS 316
13	SPINDLE	SS 316
12	VALVE GUIDE	ASTMA 351 GR CF 8M
11	GUIDE HOLDER	ASTMA 351 GR CF 8M
10	DISC GUIDE	ASTMA 351 GR CF 8M
9	DISC	SS 316 HF
8	PIN	AISI 316
7	NOZZLE-RING	ASTMA 351 GR CF 8M
6	NOZZLE	AISI 316
5	STUD-NUT	ASTMA 194 GR 2H/193 B7
4	SPRING WASHER	SS 316
3	CAP	ASTM A 216 GR WCB / MS
2	BONNET	ASTM A 216 GR WCB
1	BODY	ASTM A 216 GR WCB
Sr. No.	PARTS NAME	MATERIAL

TITLE : G.A DRAWING OF ANGLE TYPE
 SAFETY VALVE FLANGE END-150# X 150#

DARSHAN VALVE MFG CO.

DRAWN BY : JAY	Works : 42,SHREEJI INDUSTRIAL ESTATE,RAPUR MILL COMPOUND,SARASPUR,AHMEDABAD-380018 (GUJ)
CHK. BY :	
APPD. BY : DARSHAN	DRG NO: DVFL/50HB0/CS/CFBM/150#
DATE : 6/2/2011	SHEET: 1 OF 1
SCALE : N.T.S	REVISION : 0
MAT. : As shown	

