


Due to continuous product development we reserve the right to change better quality, material & minor design changes

This drawing shall not be copied or reproduced in any form without the prior written permission of the company

**TECHNICAL DATA:**

Manufacturing Std. : API 526 / API 520  
 End Connection : Flanged Ends to ASME B16.5 RF 150#

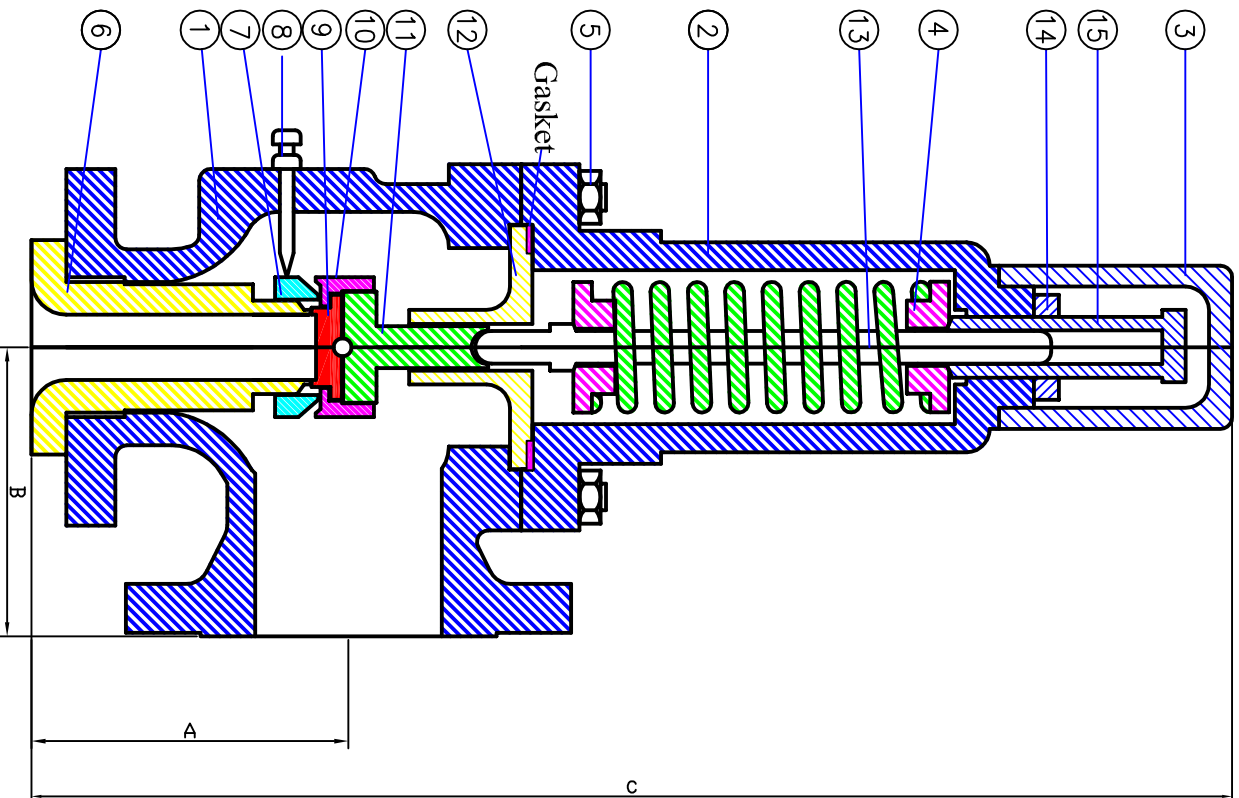

SET PRESSURE : MAX 18 KG/CM2

INLET 3" (150#)	OUTLET 4" (150#)
A 156	B 162
Orifice J	C "approx"
± dim (A&B 5)	

15	ADJUSTING SCREW	SS 316
14	LOCK NUT	SS 316
13	SPINDLE	SS 316
12	VALVE GUIDE	ASTMA 351 GR CF 8
11	GUIDE HOLDER	ASTMA 351 GR CF 8M
10	DISC GUIDE	ASTMA 351 GR CF 8M
9	DISC	SS 316 HF
8	PIN	AISI 316
7	NOZZLE-RING	ASTMA 351 GR CF8M
6	NOZZLE	ASTM A 351 GR CF8M
5	STUD-NUT	ASTMA 194 GR 2H/193 B7
4	SPRING WASHER	SS 316
3	CAP	SGI
2	BONNET	ASTM A 216 GR WCB
1	BODY	ASTM A 216 GR WCB
Sr. No.	PARTS NAME	MATERIAL

TITLE : G.A DRAWING OF ANGLE TYPE  
 SAFETY VALVE FLANGE END-150# X 150#

**DARSHAN VALVE MFG CO.**

DRAWN BY : JAY	Works : 42,SHREEJI INDUSTRIAL ESTATE,RAPUR MILL COMPOUND,SARASPUR,AHMEDABAD-380018 (GUJ)
CHK. BY :	DRG NO: DVFL/80U100/CS/CF8M/150#
APPD. BY : DARSHAN	SHEET: 1 OF 1
DATE : 6/2/2011	REVISION : 0
SCALE : N.T.S	
MAT. : As shown	

