


Due to continuous product development we reserve the right to change better quality, material & minor design changes

This drawing shall not be copied or reproduced in any form without the prior written permission of the company

TECHNICAL DATA:

Manufacturing Std. : API 520
 End Connection : Flanged Ends to ASME B16.5 FF 150#

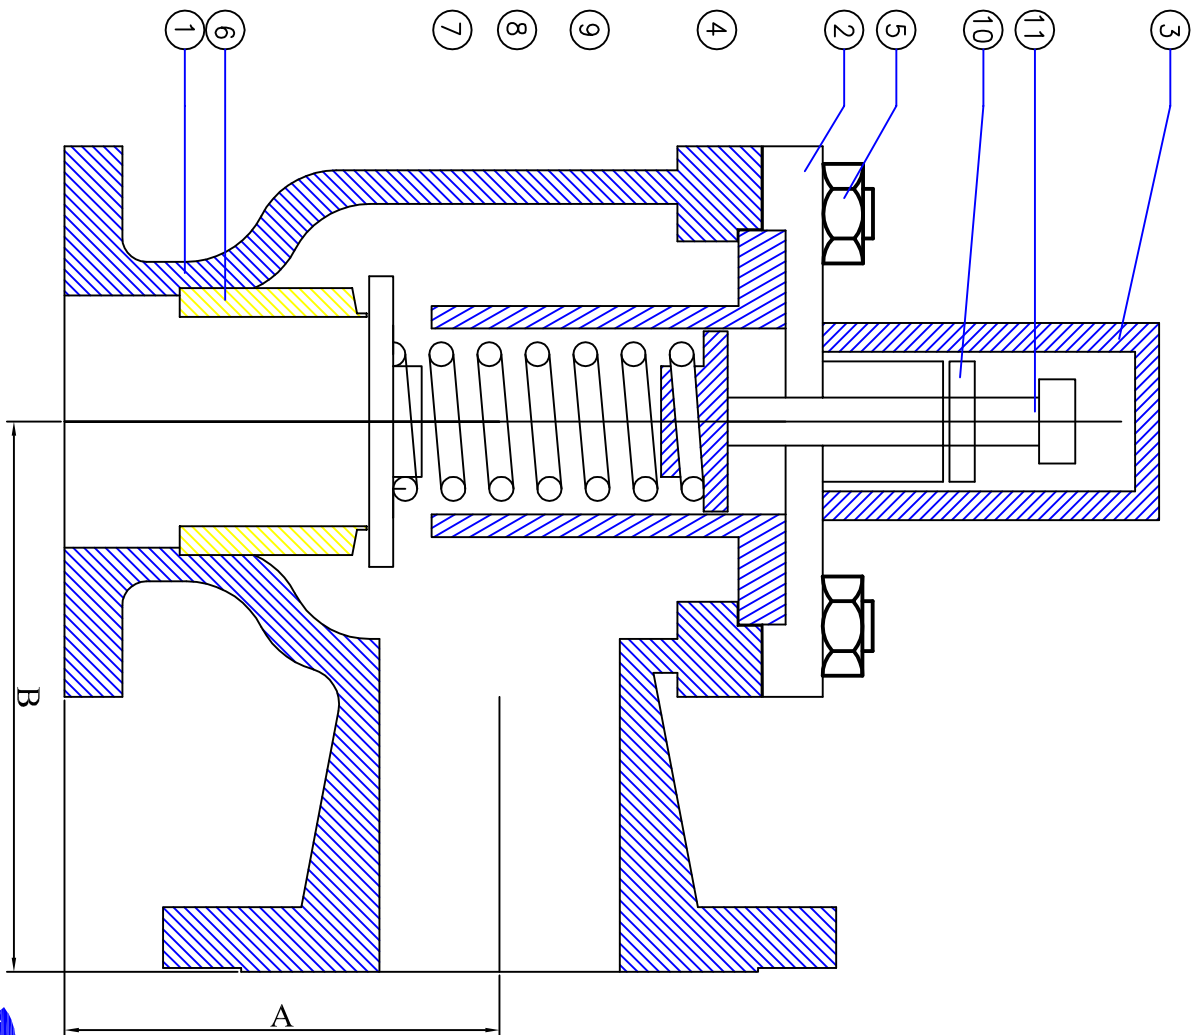

Model no : DVFL-42-LOW-RV

SET PRESSURE : 0.3 BAR TO 1.5 BAR
 Available sizes are : as per API 526

11	ADJUSTING SCREW	SS 304
10	LOCK NUT	SS 304
9	SPRING	SPRING STEEL
8	DISC GUIDE	AISI 304
7	DISC	AISI 304
6	NOZZLE	AISI 304
5	STUD-NUT	ASTMA 194 GR 2H/193 B7
4	SPRING WASHER	SS 304
3	CAP	CARBON STEEL
2	BONNET	CARBON STEEL
1	BODY	ASTM A 216 GR WCB
Sr. No.	PARTS NAME	MATERIAL

TITLE : G.A DRAWING OF ANGLE TYPE LOW PRESSURE SAFETY VALVE FLANGE END-150# X 150#

DARSHAN VALVE MFG CO.

DRAWN BY : JAY	Works : 42,SHREEJI INDUSTRIAL ESTATE,RAPPUR MILL COMPOUND,SARASPUR,AHMEDABAD-380018 (GUJ)
CHK. BY :	DRG NO: DVFL-421-LOW-150#
APPD. BY : DARSHAN	SHEET: 1 OF 1
DATE : 12/05/2012	REVISION : 0
SCALE : N.T.S	
MAT. : As shown	

